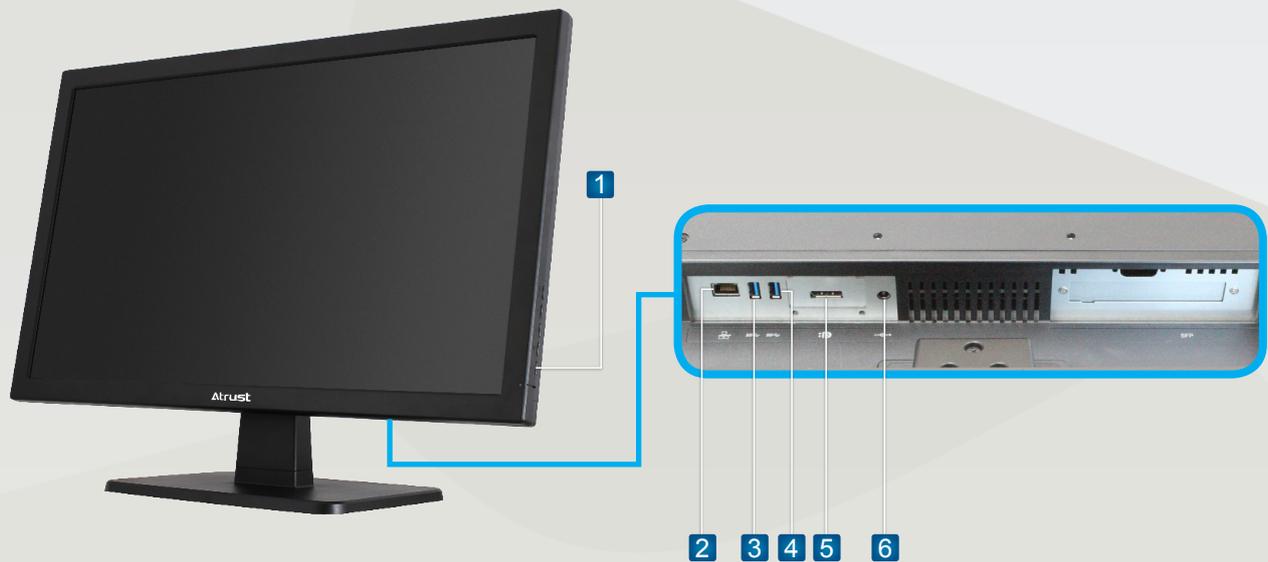# Atrust

# **Atrust** All-in-One- A210L



**1** **Power Button**
* Press to :
  a) Turn on the system.
  b) Resume from the suspend mode.
* Long press to *power off* the system.

**2** **LAN Port**
It connects to a host server through a LAN switch.

**3** **USB 3.2 Gen 1 Port**
It connects to USB device.

**4** **USB 3.2 Gen 1 Port**
It connects to USB device.

**5** **DisplayPort**
It connects to a monitor.

**6** **DC IN**
It connects to an AC adaptor.

**7** **Microphone Port**
It connects to a microphone.

**8** **Headphone Port**
It connects to a headphone or a speaker system.

**9** **USB 2.0 Port x 2**
It connects to USB devices.

**10** **USB 2.0 Port x 2**
It connects to USB devices.

# Atrust All-in-One - A210L

| System | |
|---|---|
| Processor | Intel® Braswell Quad Core  X5-E8000 1.04G  (Burst to 2.0G) |

| Memory | |
|---|---|
| System memory | 2GB (Manufacturing option: 4GB) |
| Flash memory | 8GB |

| Display | |
|---|---|
| LCD Type/Resolution | 23.6" LED Backlight / Up to 1920 x 1080 |

| I/O Interfaces | |
|---|---|
| I/O ports | 1 x DisplayPort, 2 x USB 3.2 Gen 1, 4 x USB 2.0, 1 x Audio out, 1 x Microphone port, 1 x Kensington lock slot, 1 x RJ-45, 1 x DC IN |

| Networking | |
|---|---|
| Ethernet | 10M/100M/1000Mb |

| Dimensions / Weight | |
|---|---|
| Dimensions | (W) 569.6 x (D) 183.5 x (H) 412.3 mm (with stand) |
| Weight | 4.65 kg (approximate) |

| Environment | |
|---|---|
| Cooling | Fanless |
| Operating noise | No noise |
| Operating temperature | 0℃ ~ 35℃ |
| Non-operating temperature | -20℃ ~ 60℃ |
| Operating humidity (Rh) | 10% ~ 90% (non-condensing) |
| Non-operating humidity (Rh) | 5% ~ 90% (non-condensing) |

| AC Adaptor | |
|---|---|
| Operating voltage range | 100 ~ 240 VAC |
| Rated line frequency | 50 ~ 60 Hz |
| AC Adaptor | 19V, 65W, 3.42A |
| Options | WiFi : IEEE802.11 a/b/g/n/ac<br>Internal Speaker<br>Adjustable display stand<br>TPM |